

24 Ports Gigabit PoE Switch

802.3af/at, 6KV Lightning Protection

Datasheet: VER2.0

UTP3-GSW2404TS-P200
UTP3-GSW2404TS-P420




- Provide 24* 10/100/1000Mbps downlink PoE Ethernet ports, 2* gigabit uplink Ethernet ports and 2* gigabit Fiber port,
- Downlink Ethernet ports support PoE+, each port supports max. 30W output,
- Accord with IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3 af/at standard,
- 8K MAC address, 4Mb cache,
- Quick installation, easy operation, convenient for wall-mounted, desktop and rack installations.




Introduction

The 24 ports Gigabit PoE switch is an PoE switch along with 24* 10/100/1000Base-T downlink PoE ports and 2* 1000Base-T uplink Ethernet ports featuring 30-watt 802.3 at PoE+ as well as 2 additional Gigabit port. The total PoE power budget is up to 400 watts. The device can be widely used in video security monitoring systems, network projects, etc.


Application

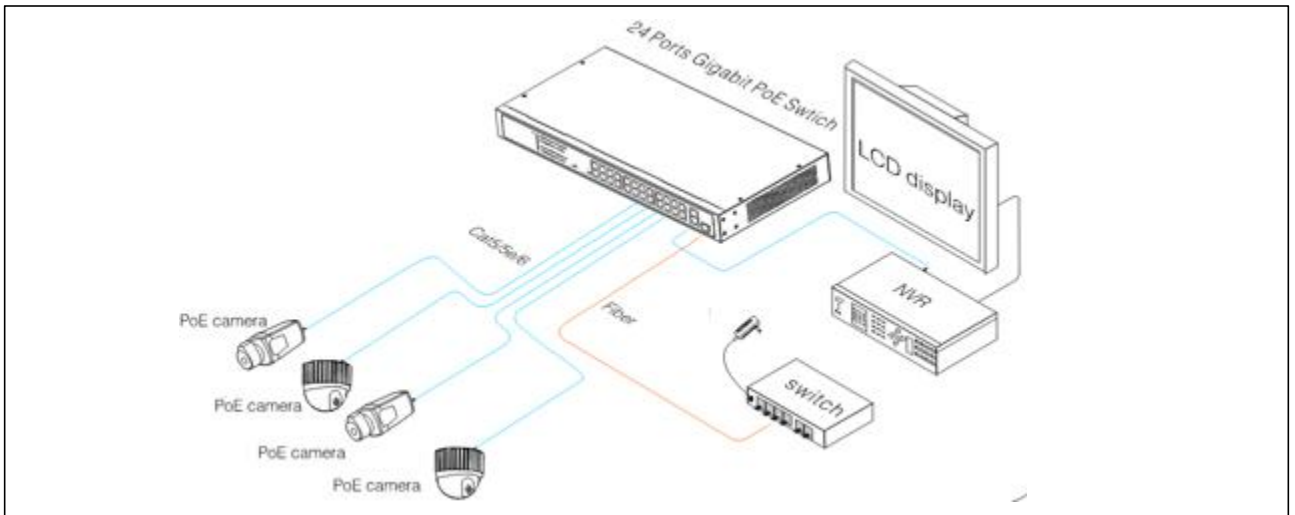

Physical Features

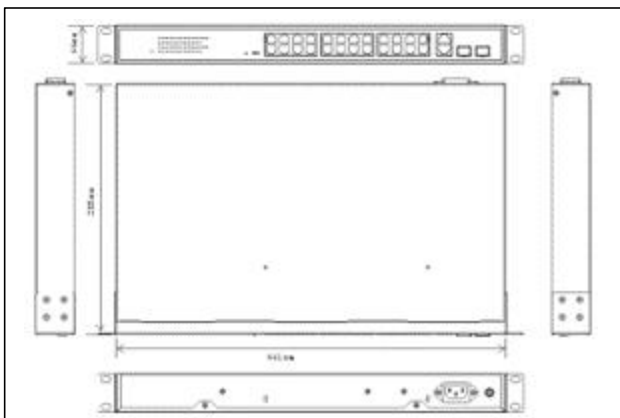

Interface drawing

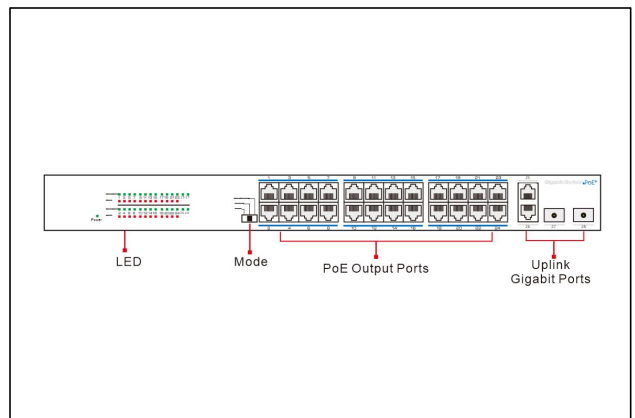

Specification

Model	UTP3-GSW2404TS-P200	UTP3-GSW204TS-P420
Downstream Ports	24* 10/100/1000Base-T(24 Ports PoE)	
Uplink Ports	2*10/100/1000Base-T and 2*1000Base-X(SFP)	
Network Standard	IEEE802.3 , IEEE802.3u, IEEE802.3ab, IEEE802.3z, IEEE802.3X	
Switch Capacity	56Gbps	
Throughput	42Mpps	
Switch Processing Scheme	Store and Forward	
Memory Buffer	4M	
MAC Table	8K	
PoE Standard	802.3af/at(PSE)	
PsE Type	End-span	
Power Pin Assignment	1/2(+), 3/6(-)	
PoE Power Output	54V DC , 30 watts max	
PoE Budget	400 watts max	
Operating mode	Default: All ports can communicate with each other	
	VLAN: 1. Downlink ports only communicate with uplink ports, 2. Restrain network storm under 2Mbps	
	Flow control: Switch flow control function is turned off, this mode is suitable for video surveillance transmission	
Lightning protection	6KV Execute: IEC61000-4-5	
ESD	6KV Contact discharge 8KV Air discharge Execute: IEC61000-4-2	
Power Supply	100~240V AC, 50/60Hz	
Power Dissipation	<420W(Including PoE)	
Work temperature	-10°C~50°C	
Storage temperature	-40°C~85°C	
Humidity(Non-condensin)	5%-95%	
Dimension (L×W×H)	442mm×285mm×44.5mm	
Weight	3kg	
Regulator	CE, FCC, ROHS	

Package List

Designation	Quantity
UTP1-SW24-TP420	1
AC Power Line	1
Hanger	2
User Manual	1

Related Products

Designation	Model
8 Ports Gigabit PoE Switch	UTP3-GSW0802-TSP120
5 Ports Gigabit PoE Switch	UTP1-GSW0401-TP60