


Cambium 600SSH Details

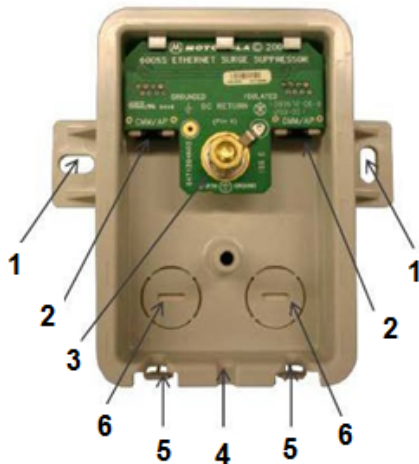

1.- Holes—for mounting the Surge Suppressor to a flat surface (such as an outside wall). The distance between centers is 4.25 inches (108 mm).

2.- RJ-45 connectors—One side (neither side is better than the other for this purpose) connects to the product (AP, SM, or cluster management module). The other connects to the AC adaptor's Ethernet connector.

3.- Ground post and washer—use heavy gauge (10 AWG or 6 mm) copper wire for connection. Refer to local electrical code for exact specifications

4.- Ground Cable Opening—route the 10 AWG (6 mm) ground cable through this opening.

5 CAT-5 Cable Knockouts—route the two CAT-5 cables through these openings, or alternatively through the Conduit Knockouts

6 Conduit Knockouts—on the back of the case, near the bottom. Available for installations where cable is routed through building conduit